

Flat Cables

FFC-Flat Flexible Cables AXOJUMP™

Designed for board-to-board interconnections in electronic systems, Axojump™ Flat Flexible Cables (FFC) are made up of flat tin or gold plated copper conductors insulated with Polyester or Polyimide tapes. From 0.30 mm pitch for space saving to 1.25 mm, a large variety of pitches is available to suit your needs. In addition to the standard range, AXON' has developed custom designed flat flex cables incorporating folds, shields, notches, punching, slitting or marking. Flat Flexible Cables are compatible with ZIF and LIF connectors.



0.30 mm pitch Flat Flexible Cables

General characteristics

Temperature rating: up to 105°C.

Voltage rating: up to 30V AC.

Conductor

Pitch: 0.30 mm.

Width: 0.20 ± 0.015 mm.

Conductor thickness: 0.035 mm typical value.

Max. conductor resistance: 2800 (Ω /km) at 20°C.


Conductor plating

Gold: 0.3 μ m Ni (mini) / 0.05 μ m Au.

Insulation

Polyester insulation with flame retardant adhesive.

White colour.

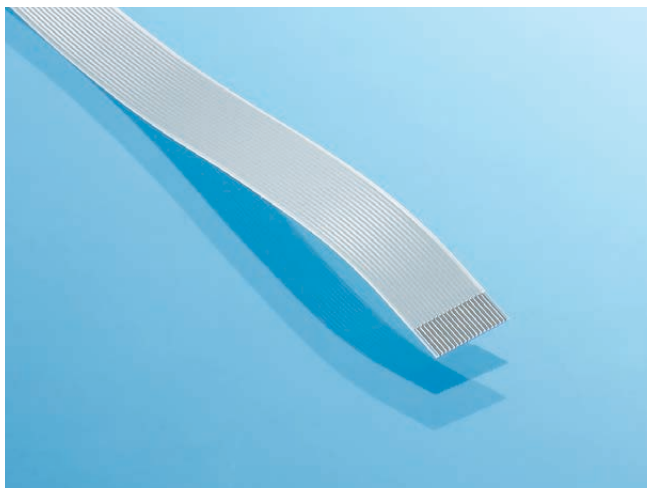

0.30 MM PITCH STANDARD FLAT FLEXIBLE CABLE.


Connection scheme

With ZIF connectors

- Reinforcement tape: Polyester L code.
- Blue colour.



General drawing

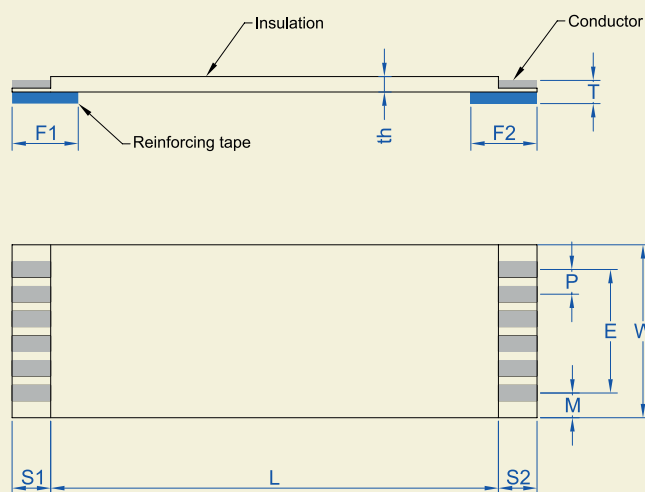


0.30 mm pitch Flat Flexible Cables

Processing forms



Type A

Reinforcements at both ends,
on the same side.



Type D

Reinforcements at both ends,
on opposing side.

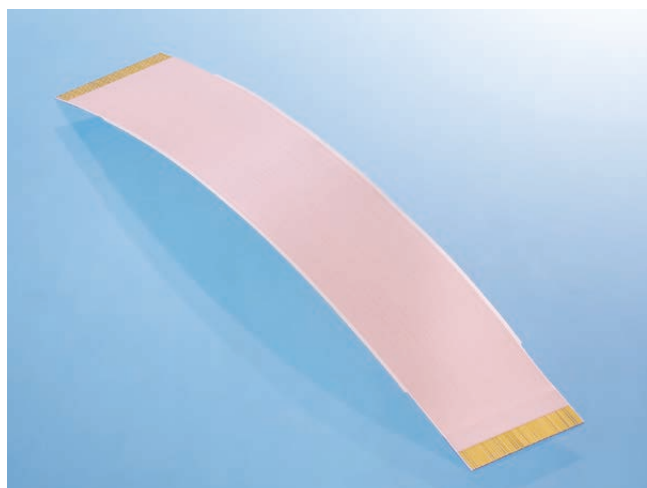

0.30 MM PITCH GOLD PLATED FLAT FLEXIBLE CABLE.

Dimensions


Pitch: P (mm)	0.30 ± 0.03
Number of conductors: N	11 to 51
Span: E (mm)	$(N-1) \cdot 0.30 \pm 0.03$
Width: W (mm) (on connection area)	$(N+1) \cdot 0.30 \pm 0.03$
Margin: M (mm)	0.30 ± 0.05
Strip length: S1-S2 (mm)	4.00 ± 0.80
Reinforcement length: F1-F2 (mm)	8.00 ± 2.00
Insulated length: L (mm)	42 to 60 ± 2 61 to 100 ± 3 101 to 200 ± 4 201 to 500 ± 5
Thickness at end of cable: T (mm)	0.20 ± 0.03
Cable thickness: th (mm)	0.12 (typical value)

0.30 mm pitch Flat Flexible Cables

Electrical properties

	Testing conditions	Values
Dielectric Test (V AC) - Min	Conductor to conductor, during 1 minute	100
Current rating (A) - Max	FFC at 23°C Allowable temperature rise : 40°C	0.30
Insulation resistance (M Ω .m min)	Conductor to conductor	10 at DC 100V
Continuity test	DC 3.0 V at 0.1mA	Passed
Impedance cond/cond balanced method (typical value)	FFC without shielding at 1MHz	145 Ω
Capacitance cond/cond balanced method (typical value)	FFC without shielding at 1KHz	70 pF/m

Other properties

	Testing conditions	Characteristics	
Heat resistance	113°C, 168 hours	Dielectric test Insulation resistance	Passed Passed
Thermal shock	(-55°C x 30 min → 25°C x 5 min → 85°C x 30 min → 25°C x 5 min) x 25 cycles	Dielectric test Insulation resistance	Passed Passed
Cold coiling	-40°C, 96 hours The sample is initially wound on a mandrel of 3 mm	At room temperature: Visual inspection Dielectric test Insulation resistance	Passed Passed Passed
Wear by abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: $\varnothing = 0.50$ mm	Dielectric test Insulation resistance: After 500 cycles	Passed
Flame resistance	UL 758	VW-1	Passed
Folding	The specimen is folded manually at 180°	Continuity after more than 20 times	Passed
Moisture resistance	60°C, 95% RH, 96 hours	Dielectric test Insulation resistance	Passed Passed
Flex-life Number of cycles (typical values)	Speed 100 cycles /min Flex-life test is performed at 23°C. 	Radius 10 mm	500 000

0.30 mm pitch Flat Flexible Cables

Identification code

FFC 0.30 A 25/0200 E 4.0-4.0-08.0-08.0 E A LL/AU

Option:

Plating on conductors

AU: gold plating

Reinforcement type (F1 & F2):

L: Polyester reinforcement

UL compliance:

A: No compliance

Conductor thickness: **E** (35 microns)

Reinforcement **length F2** in mm
(8 mm standard length)

Reinforcement **length F1** in mm
(8 mm standard length)

Strip **length S2** in mm (4 mm standard length)

Strip **length S1** in mm (4 mm standard length)

Insulation: **E**

Insulation length **L** in mm

Number of conductors: **N**

Processing form: **A or D**

Pitch **P** in mm

Flat Flexible Cable

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 100 micron conductors

Standard versions


General characteristics

Temperature rating: up to 105°C.

Voltage rating: up to 60V AC.

Conductor


Pitch (mm)	Width (mm)	Max conductor resistance (Ω/km) at 20°C	Conductor thickness (mm)
0.50	0.30 ± 0.02	730	0.10 ± 0.015
1.00	0.70 ± 0.03	300	0.10 ± 0.015
1.25	0.80 ± 0.03	280	0.10 ± 0.015

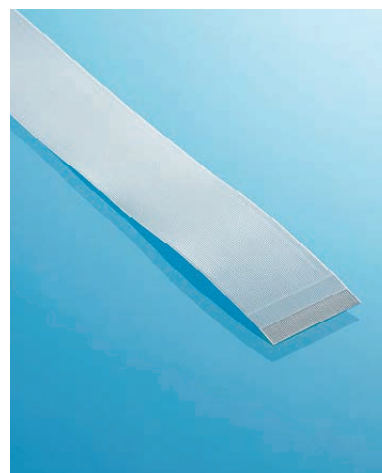

0.50 MM PITCH STANDARD FLAT FLEXIBLE CABLE

Conductor plating

Tin	0.4 µm mini
Gold	0.3 µm Ni mini / 0.05 µm Au

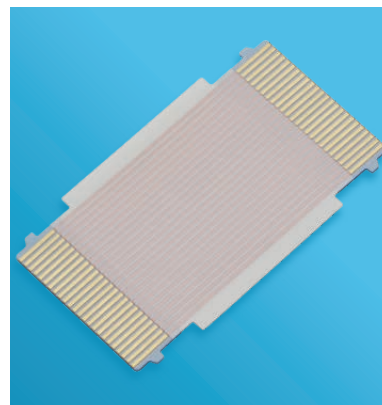

0.50 MM PUNCHED FLAT FLEXIBLE CABLE

Insulation

Polyester insulation with flame retardant adhesive.

White colour.

Connection schemes

With ZIF connectors

Reinforcement tape: Polyester K code.
Blue colour.



Hot bar soldering

Reinforcement tape: Polyimide H code.
Natural colour (amber).




Manual soldering

Code for the end: T.
F1 ; F2 = 2.50 mm.



0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 100 micron conductors


General drawing

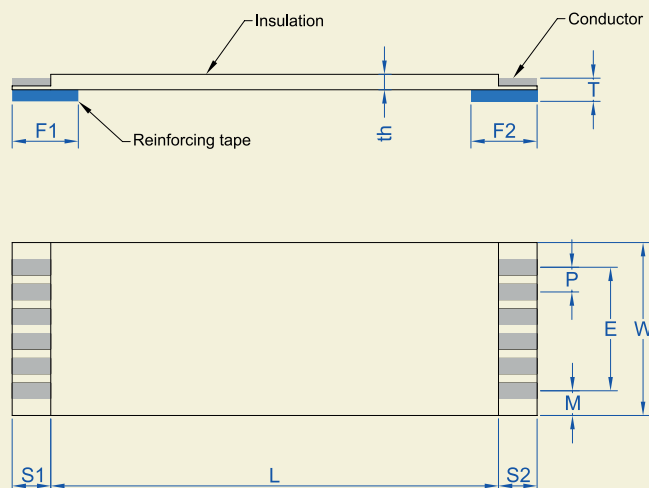

Processing forms


Type A

Reinforcements at both ends,
on the same side.



Type D

Reinforcements at both ends,
on opposing side.



Dimensions


Pitch: P (mm)	0.50 ± 0.05	1.00 ± 0.08	1.25 ± 0.10
Number of conductors: N	6 to 80	4 to 60	4 to 60
Span: E (mm)	(N-1)*0.50 ± 0.07	(N-1)*1.00 ± 0.15	(N-1)*1.25 ± 0.15
Width: W (mm)	(N+1)*0.50 ± 0.06	(N+1)*1.00 ± 0.10	(N+1)*1.25 ± 0.15
Margin: M (mm)	0.50 ± 0.12	1.00 ± 0.20	1.25 ± 0.20
Strip length: S1-S2 (mm)	2.00 to 10.0 ± 0.80 (standard value: 4 mm)		
Reinforcement length: F1-F2 (mm)	6.00 to 20.0 ± 2.00 (standard value: 8 mm)		
Insulated length: L (mm)	20 to 60 ± 2 61 to 100 ± 3 101 to 200 ± 4		
Thickness at end of cable: T (mm)	0.30 ± 0.05 (only for ZIF connectors)		
Cable thickness: t_h (mm)	0.25 typical		

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 100 micron conductors


Electrical properties

	Testing conditions	Pitch		
		0.50	1.00	1.25
Dielectric Test (V AC) - Min	Conductor to conductor, during 1 minute	200	400	500
Current rating (A) - Max	FFC at 23°C Allowable temperature rise: 40°C	0.55	1.25	1.40
Insulation resistance (M Ω .m min)	Conductor to conductor	10 at DC 200V	10 at DC 400V	10 at DC 500V
Continuity test	DC 3.0 V at 0.1mA	Passed	Passed	Passed
Impedance cond/cond balanced method (typical value)	FFC without shielding at 1MHz	130 Ω	120 Ω	130 Ω
Capacitance cond/cond balanced method (typical value)	FFC without shielding at 1KHz	62 pF/m	50 pF/m	30 pF/m


Other properties

	Testing conditions	Characteristics	
Heat resistance	136°C, 168 hours	Dielectric test Insulation resistance	Passed Passed
Thermal shock	(-55°C x 30 min → 25°C x 5 min → 85°C x 30 min → 25°C x 5 min) x 25 cycles	Dielectric test Insulation resistance	Passed Passed
Cold coiling	-40°C, 96 hours The sample is initially wound on a mandrel of 3 mm	At room temperature: Visual inspection Dielectric test Insulation resistance	Passed Passed Passed
Wear by abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: $\varnothing = 0.50$ mm	Dielectric test Insulation resistance: After 10 000 cycles	Passed
Flame resistance	UL 758	VW-1	Passed
Folding	The specimen shall be folded manually at 180°	Continuity after more than 20 times	Passed
Moisture resistance	60°C, 95% RH, 96 hours	Dielectric test Insulation resistance	Passed Passed
Flex-life (typical values)	speed 100 cycles /min Flex-life tests are performed at 23°C. 	Radius 10 mm	100 000 cycles

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 100 micron conductors

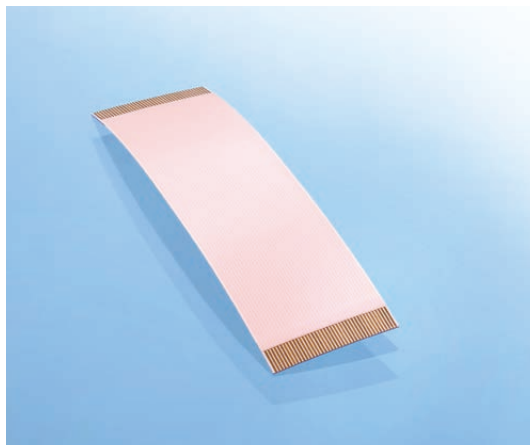

0.50 MM PITCH GOLD PLATED FLAT FLEXIBLE CABLE

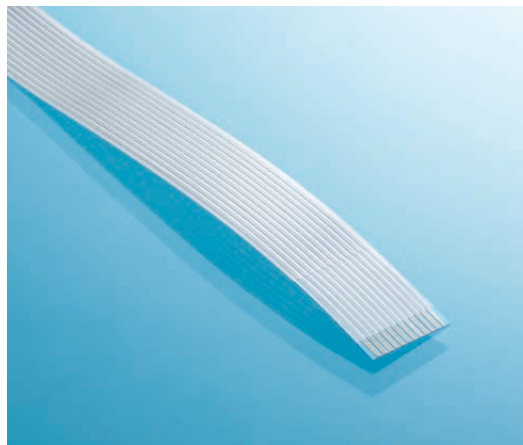

1.00 MM PITCH TIN PLATED FLAT FLEXIBLE CABLE

UL compliance

With code A: the products are UL compliant.

With code B: the products are UL certified style 20706 and shipped with UL labels.

Temperature rating: 105°C; Voltage rating: 60V AC.

AXON'Cable UL file number: E45046.






Marking definition on the cable:

FFC with L > 30 mm and W > 9mm will have black printing on one side with the following text:

"AXON'CABLE –  – AWM – STYLE 20706 – 105C – 60V – VW-1"

Special designs

Special designs available on request, such as specific shapes for connectors with locking systems.

Pitch: P (mm)	0.50	0.50	0.50	0.50	1.00
FFC Drawing					

*0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables
100 micron conductors*

Identification code

FFC 1.00 A 25/0200 B 4.0-4.0-08.0-08.0 S A KK/AU

Options:

Plating on conductors

-: tin plating

AU: gold plating

Reinforcement type (F1 & F2):

K: Polyester reinforcement

H: Polyimide reinforcement

T: Manual soldering

UL compliance:

A: Without UL marking

B: UL certified 20706

Conductor thickness: s

(100 microns)

Reinforcement **length F2** in mm
(8 mm standard length)

Reinforcement **length F1** in mm
(8 mm standard length)

Strip **length S2** in mm (4 mm standard length)

Strip **length S1** in mm (4 mm standard length)

Insulation: **B**

Insulation length **L** in mm

Number of conductors: **N**

Processing form: **A or D**

Pitch **P** in mm

Flat Flexible Cable

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 50 and 35 micron conductors

Flexible and extra-flexible versions

General characteristics

Temperature rating: up to 105°C.

Voltage rating: up to 60V AC.

Conductor

Pitch (mm)	Width (mm)	Max Conductor Resistance (Ω /km) at 20°C	
		Flexible (50 μ m)	Extra flexible (35 μ m)
0.50	0.30 \pm 0.02	1460	2200
1.00	0.70 \pm 0.03	550	790
1.25	0.80 \pm 0.03	480	710
Conductor thickness (typical value)		0.05 mm	0.035 mm

Conductor plating

Tin	0.4 μ m min
Gold	0.3 μ m Ni min / 0.05 μ m Au

Insulation

Polyester insulation with flame retardant adhesive.

White colour.

Connection schemes

With ZIF connectors

Reinforcement tape: Polyester B code.

Blue colour.



Hot bar soldering


Reinforcement tape: Polyimide H code.

Natural colour (amber).



0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 50 and 35 micron conductors


General drawing

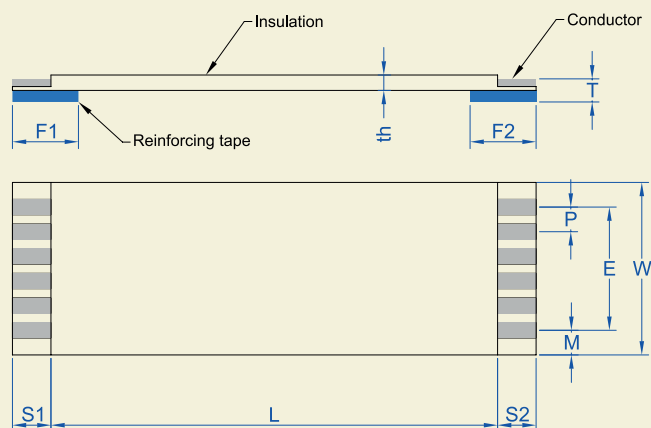

Processing forms


Type A

Reinforcements at both ends,
on the same side.



Type D

Reinforcements at both ends,
on opposing side.



Dimensions


Pitch: P (mm)	0.50 ± 0.05	1.00 ± 0.08	1.25 ± 0.10
Number of conductors: N	6 to 80	4 to 60	4 to 60
Span: E (mm)	$(N-1) \cdot 0.50 \pm 0.07$	$(N-1) \cdot 1.00 \pm 0.15$	$(N-1) \cdot 1.25 \pm 0.15$
Width: W (mm)	$(N+1) \cdot 0.50 \pm 0.06$	$(N+1) \cdot 1.00 \pm 0.10$	$(N+1) \cdot 1.25 \pm 0.15$
Margin: M (mm)	0.5 ± 0.12	1.00 ± 0.20	1.25 ± 0.20
Strip length: S1-S2 (mm)	2.00 to 10.0 ± 0.80 (standard value: 4 mm)		
Reinforcement length: F1-F2 (mm)	6.00 to 20.0 ± 2.00 (standard value: 8 mm)		
Insulated length: L (mm)	20 to 60 ± 2 61 to 100 ± 3 101 to 200 ± 4		201 to 3999 ± 5 4000 to 5999 ± 10 6000 to 9999 ± 15
Thickness at end of cable: T (mm)	0.30 ± 0.05 (only for ZIF connectors)		
Cable thickness: t_h (mm)	Flexible: 0.14 / Extra flexible: 0.12 (typical value)		

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 50 and 35 micron conductors

Electrical properties

	Testing conditions	Pitch		
		0.50	1.00	1.25
Dielectric Test (V AC) - Min	Conductor to conductor, during 1 minute	200	400	500
Current rating (A) - Max Flexible conductor	FFC at 23°C Allowable temperature rise : 40°C	0.40	0.80	0.85
Current rating (A) - Max Extra flexible conductor		0.35	0.80	0.80
Insulation resistance (M Ω .m min)	Conductor to conductor	10 at DC 200V	10 at DC 400V	10 at DC 500V
Continuity test	DC 3.0 V at 0.1mA	Passed	Passed	Passed
Impedance cond/cond balanced method (typical value)	FFC without shielding at 1MHz	150 Ω	150 Ω	170 Ω
Capacitance cond/cond balanced method (typical value)	FFC without shielding at 1KHz	50 pF/m	40 pF/m	35 pF/m


Other properties

	Testing conditions	Characteristics		
Heat resistance	136°C, 168 hours	Dielectric test Insulation resistance	Passed Passed	
Thermal shock	(-55°C x 30 min → 25°C x 5 min → 85°C x 30 min → 25°C x 5 min) x 25 cycles	Dielectric test Insulation resistance	Passed Passed	
Cold coiling	-40°C, 96 hours The sample is initially wound on a mandrel of 3 mm	At room temperature: Visual inspection Dielectric test Insulation resistance	Passed Passed Passed	
Wear by abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: \varnothing = 0.50 mm	Dielectric test Insulation resistance: After 500 cycles	Passed	
Flame resistance	UL 758	VW-1	Passed	
Folding	The specimen shall be folded manually at 180°	Continuity after more than 20 times	Passed	
Moisture resistance	60°C, 95% RH, 96 hours	Dielectric test Insulation resistance	Passed Passed	
Flex-life Number of cycles (typical values)	Speed 100 cycles /min Flex-life test is performed at 23°C. 	Radius	5 mm	10 mm
		Flexible	300 000	2 500 000
		Extra flexible	700 000	5 000 000

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 50 and 35 micron conductors



0.50 MM PITCH STANDARD FLAT FLEXIBLE CABLE

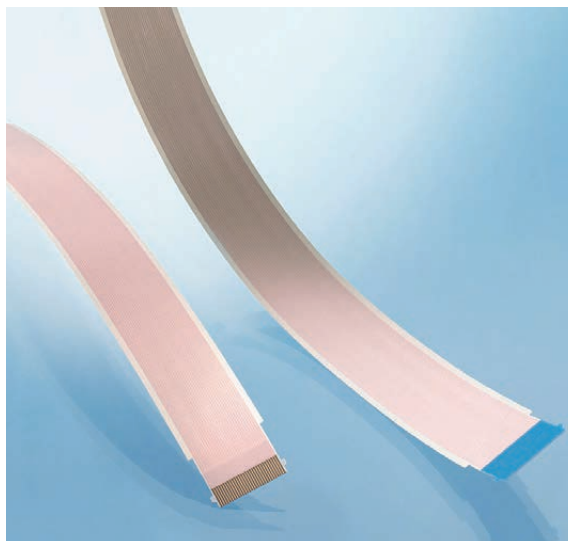

0.50 MM PITCH PUNCHED FLAT FLEXIBLE CABLE

UL compliance

With code A: the products are UL compliant.

With code B: the products are UL certified style 20706 and shipped with UL labels.

Temperature rating: 105°C; Voltage rating: 60V AC.

AXON'Cable UL file number: E45046.






Marking definition on the cable:

FFC with L > 30 mm and W > 9mm will have black printing on one side with the following text:

"AXON'CABLE –  – AWM – STYLE 20706 – 105C – 60V – VW-1"

Special designs

Special designs available on request, such as specific shapes for connectors with locking systems.

Pitch: P (mm)	0.50	0.50	0.50	0.50	1.00
FFC Drawing					

*0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables
50 and 35 micron conductors*

Identification code

FFC 1.00 A 25/0200 E 4.0-4.0-08.0-08.0 F A BB/AU

Options:

Plating on conductors
-: tin plating

AU: gold plating

Reinforcement type (F1 & F2):

B: Polyester reinforcement

UL compliance:

A: Without UL marking

B: UL certified 20706

Conductor thickness:

F: Flexible (50 microns)

E: Extra flexible (35 microns)

Reinforcement **length F2** in mm
(8 mm standard length)

Reinforcement **length F1** in mm
(8 mm standard length)

Strip **length S2** in mm (4 mm standard length)

Strip **length S1** in mm (4 mm standard length)

Insulation: **E**

Insulation length **L** in mm

Number of conductors: **N**

Processing form: **A or D**

Pitch **P** in mm

Flat Flexible Cable

1.00 mm pitch Flat Flexible Cables 25 micron conductors

Ultra-flexible versions

General characteristics

Temperature rating: up to 105°C.

Voltage rating: up to 60V AC.

Conductor

Pitch (mm)	Width (mm)	Max Conductor Resistance (Ω /km) at 20°C
		Ultra Flexible (25 μ m)
1.00	0.60 \pm 0.03	1500
Conductor thickness (typical value)		0.025 mm

Conductor plating

Tin	0.4 μ m min
Gold	0.3 μ m Ni min / 0.05 μ m Au

Insulation

Polyester insulation with flame retardant adhesive. White colour.

Connection schemes


With ZIF connectors

Reinforcement tape: Polyester B code.

Blue colour.



General drawing

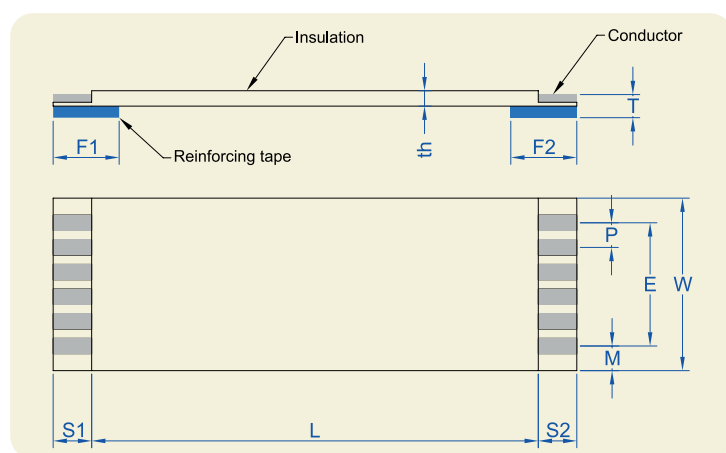


1.00 mm pitch Flat Flexible Cables 25 micron conductors

Processing forms


Type A

Reinforcements at both ends,
on the same side.



Type D

Reinforcements at both ends,
on opposing side.



Dimensions


	1.00 mm pitch ± 0.08	
Number of conductors: N	4 to 60	
Span: E (mm)	$(N-1) \times 1.00 \pm 0.15$	
Width: W (mm)	$(N+1) \times 1.00 \pm 0.10$	
Margin: M (mm)	1.00 ± 0.20	
Strip length: S1-S2 (mm)	2.00 to 10.0 ± 0.80 (standard value: 4 mm)	
Reinforcement length: F1-F2 (mm)	6.00 to 20.0 ± 2.00 (standard value: 8 mm)	
Insulated length: L (mm)	20 to 60 ± 2 61 to 100 ± 3 101 to 200 ± 4	201 to 3999 ± 5 4000 to 5999 ± 10 6000 to 9999 ± 15
Thickness at end of cable: T (mm)	0.30 ± 0.05 (only for ZIF connectors)	
Cable thickness: th (mm)	0.11 (typical value)	

Electrical properties

	Testing conditions	1.00 mm pitch
Dielectric Test (V AC) - Min	In air, during 1 minute	400
Current rating (A) - Max Ultra Flexible conductor	FFC at 23°C Allowable temperature rise : 40°C	0.5
Insulation resistance conductor to conductor (M Ω .m min)		10 at DC 400V
Continuity test	DC 3.0 V at 0.1mA	Passed
Impedance cond/cond balanced method (typical value)	FFC without shielding at 1MHz	90 Ω
Capacitance cond/cond balanced method (typical value)	FFC without shielding at 1KHz	30 pF/m

1.00 mm pitch Flat Flexible Cables 25 micron conductors

Other properties

	Testing conditions	Characteristics		
Heat resistance	136°C, 168 hours	Dielectric test Insulation resistance	Passed Passed	
Thermal shock	(-55°C x 30 min → 25°C x 5 min → 85°C x 30 min → 25°C x 5 min) x 25 cycles	Dielectric test Insulation resistance	Passed Passed	
Cold coiling	-40°C, 96 hours The sample is initially wound on a mandrel of 3 mm	At room temperature: Visual inspection Dielectric test Insulation resistance	Passed Passed Passed	
Wear by abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: Ø = 0.50 mm	Dielectric test Insulation resistance: After 500 cycles	Passed	
Flame resistance	UL 758	VW-1	Passed	
Folding	The specimen shall be folded manually at 180°	Continuity after more than 20 times	Passed	
Moisture resistance	60°C, 95% RH, 96 hours	Dielectric test Insulation resistance	Passed Passed	
Flex-life Number of cycles (typical values)	Speed 100 cycles /min Flex-life test is performed at 23°C. 	Radius	5 mm	10 mm
		Ultra flexible	10 000 000	70 000 000



FLEX LIFE TEST



ULTRA-FLEXIBLE FLAT CABLE

UL compliance

With code A: the products are UL compliant.

With code B: the products are UL certified style 20706 and shipped with UL labels.

Temperature rating: 105°C; Voltage rating: 60V AC.

AXON'Cable UL file number: E45046.

Marking definition on the cable:

FFC with L > 30 mm and W > 9mm will have black printing on one side with the following text:

"AXON'CABLE –  – AWM – STYLE 20706 – 105C – 60V – VW-1"

1.00 mm pitch Flat Flexible Cables 25 micron conductors

Identification code

FFC 1.00 A 25/0200 E 4.0-4.0-08.0-08.0 U A BB/AU

Options:

Plating on conductors

-: tin plating

AU: gold plating

Reinforcement type (F1 & F2):

B: Polyester reinforcement

UL compliance:

A: Without UL marking

B: UL certified 20706

Conductor thickness:

U: Ultra Flexible (25 microns)

Reinforcement **length F2** in mm
(8 mm standard length)

Reinforcement **length F1** in mm
(8 mm standard length)

Strip **length S2** in mm (4 mm standard length)

Strip **length S1** in mm (4 mm standard length)

Insulation: **E**

Insulation length **L** in mm

Number of conductors: **N**

Processing form: **A or D**

Pitch **P** in mm

Flat **Flexible Cable**

Shielded Flat Flexible Cables

General characteristics

Temperature rating: up to 105°C.

Voltage rating: up to 60 V AC.

Conductor

Pitch (mm)	Width (mm)	Max Conductor Resistance (Ω /km) at 20°C
0.50	0.30 \pm 0.02	1460
1.00	0.70 \pm 0.03	550
Conductor thickness (Typical value)		0.05 mm

Conductor plating

Tin	0.4 μ m min
Gold	0.3 μ m Ni min / 0.05 μ m Au

Insulation

Polyester insulation with flame retardant adhesive.

White colour.

Shielding

Aluminium tape with Polyester insulation

Grey colour

Shielding is possible on flat cables with:

- a width W of 3.5 to 40 mm and a length L of 70 to 300 mm,

> For other dimensions (Please contact us for further information).

> Version S

Aluminium shielded version without grounding.

> Version G + grounded tracks (for example G2-5)

Aluminium shielded version with grounding (no limit for the number of grounds).



SHIELDED FLAT CABLE

Connection scheme

With ZIF connectors


Polyester reinforcement tape.

Blue colour.



Shielded Flat Flexible Cables


General drawing

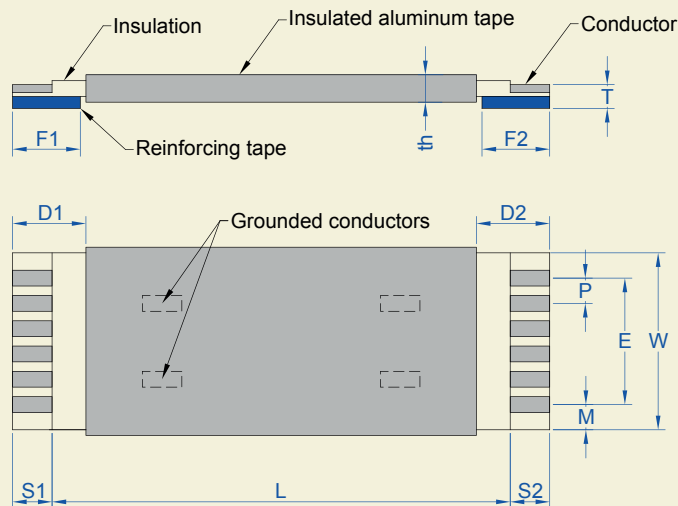

Processing forms


Type A

Reinforcements at both ends,
on the same side.



Type D

Reinforcements at both ends,
on opposing side.



Dimensions


Pitch: P (mm)	0.50 ± 0.05	1.00 ± 0.08
Number of conductors: N	6 to 80	4 to 60
Span: E (mm)	$(N-1) \cdot 0.50 \pm 0.07$	$(N-1) \cdot 1.00 \pm 0.15$
Width: W (mm)	$(N+1) \cdot 0.50 \pm 0.10$	$(N+1) \cdot 1.00 \pm 0.10$
Margin: M (mm)	0.50 ± 0.12	1.00 ± 0.20
Strip length: S1-S2 (mm)	$2.00 \text{ to } 10.0 \pm 0.80$ (standard value: 4 mm)	
Reinforcement length: F1-F2 (mm)	$6.00 \text{ to } 20.0 \pm 2.00$ (standard value: 8 mm)	
Shielding position: D1-D2(mm)	$(F1 \text{ or } F2 \text{ max} + 1) \pm 3$	
Insulated length: L (mm)	$70 \text{ to } 100 \pm 3$ $101 \text{ to } 200 \pm 4$ $201 \text{ to } 300 \pm 5$	
Thickness at end of cable: T (mm)	0.30 ± 0.05	
Cable thickness: th (mm)	0.22 (typical value)	0.28 (typical value)

Shielded Flat Flexible Cables

Electrical properties

	Testing conditions	Pitch	
		0.50	1.00
Dielectric Test (V AC) - Min	Conductor to conductor, during 1 minute	200	400
Current rating (A) - Max FFC at 23°C Allowable temperature rise: 40°C	Flexible conductor	0.50	1.00
Insulation resistance (MΩ.m min)	Conductor to conductor	10 at DC 200V	10 at DC 400V
Continuity test	DC 3.0 V at 0.1mA	Passed	Passed
Impedance cond/cond balanced method (typical value)	FFC with shielding at 1 MHz	67 Ω	60 Ω
Impedance cond/shielding (typical value)	FFC with shielding at 1 MHz	45 Ω	40 Ω
Capacitance cond/cond balanced method (typical value)	FFC with shielding at 1 KHz	230 pF/m	220 pF/m
Capacitance cond / shielding (typical value)	FFC with shielding at 1 KHz	470 pF/m	500 pF/m

Other properties

	Testing conditions	Characteristics	
Heat resistance	113°C, 168 hours	Dielectric test Insulation resistance	Passed Passed
Thermal shock	(-55°C x 30 min → 25°C x 5 min → 85°C x 30 min → 25°C x 5 min) x 25 cycles	Dielectric test Insulation resistance	Passed Passed
Cold coiling	-40°C, 96 hours The sample is initially wound on a mandrel of 3 mm	At room temperature: Visual inspection Dielectric test Insulation resistance	Passed Passed Passed
Wear by Abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: Ø = 0.50 mm	Dielectric test Insulation resistance: after 500 cycles	Passed
Flame resistance	UL 758	VW-1	Passed
Folding	The specimen shall be folded manually at 180°	Continuity after more than 20 times	Passed
Moisture resistance	60°C, 95% RH, 96 hours	Dielectric test Insulation resistance	Passed Passed
Flex-life Number of cycles (typical values)	Speed 100 cycles /min Flex-life test is performed at 23°C. 	Radius 10 mm	1 000 000 cycles

Shielded Flat Flexible Cables

UL compliance

UL compliance only for shielded FFC **without grounding**.

With code A: the products are UL compliant.

With code B: the products are UL certified style 20706 and shipped with UL labels.

Temperature rating: 105°C; Voltage rating: 60V AC.

AXON'Cable UL file number: E45046.

Marking definition on the cable:

FFC with L > 30 mm and W > 9mm will have black printing on one side with the following text:

"AXON'CABLE –  – AWM – STYLE 20706 – 105C – 60V – VW-1"



SHIELDED FLAT FLEXIBLE CABLES

Shielded Flat Flexible Cables

Identification code

FFC 0.50 A 50 / 0200 E 4.0 - 4.0 - 08.0 - 08.0 F A BB / AU / G2 - 5

Shielding:**S:** Aluminium shielding without grounding**G:** Grounded Aluminium shielding + n° of grounded conductors**Options:**

Plating on conductors

-: tin plating

AU: gold plating**Reinforcement type (F1 & F2):****B** (for pitch of 0.5mm)**J** (for pitch of 1mm)**UL compliance:****A:** Without UL marking**B:** UL certified 20706**Conductor thickness:****F:** Flexible (50 microns)Reinforcement **length F2** in mm
(8 mm standard length)Reinforcement **length F1** in mm
(8 mm standard length)Strip **length S2** in mm (4 mm standard length)Strip **length S1** in mm (4 mm standard length)**Insulation:****E** (for pitch of 0.5mm)**B** (for pitch of 1mm)Insulation length **L** in mmNumber of conductors: **N**Processing form: **A or D**Pitch **P** in mmFlat **Flexible Cable**